




VIEW F-F

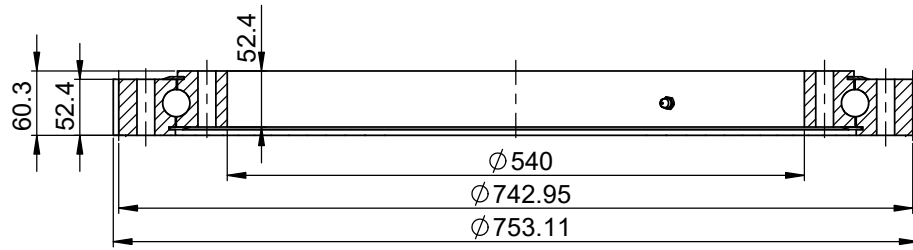

Gear data

Module	$m_n$	6.35	Addendum	$h_a$	5.08
No. of teeth	$z$	117	Tooth height	$h$	11.43
Pressure angle	$\alpha_n$	20°	Modification coefficient	$x_n$	0
Helix angle		0°	Helix position		-
common normal line	$W \frac{Ebms}{Ebmi}$	263.477 <sup>-0.143</sup> -0.286	Cross-tooth No.		
			$k$		14
Radial run-out		$F_v$			≤0.50
Max gear tooth load		$F_z$			46806 N

Tilting Torque VS Axial Load

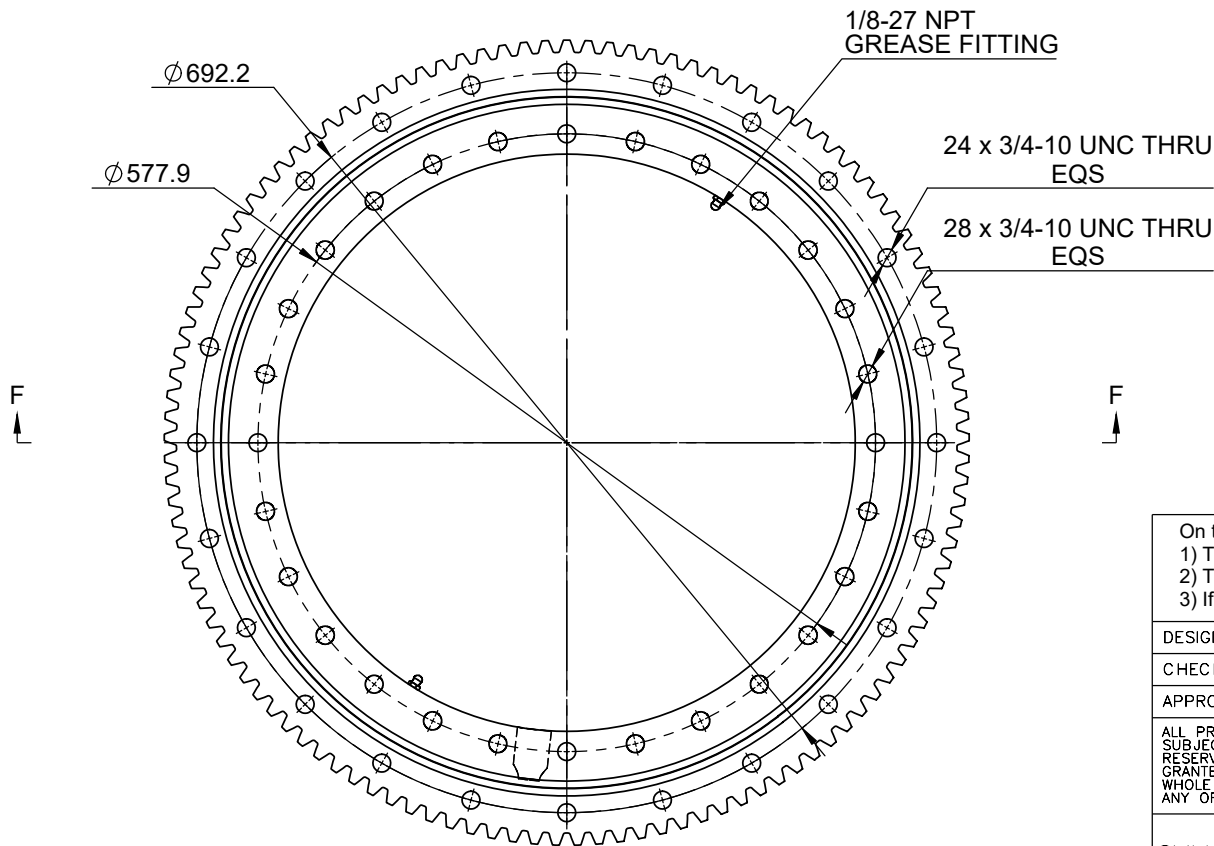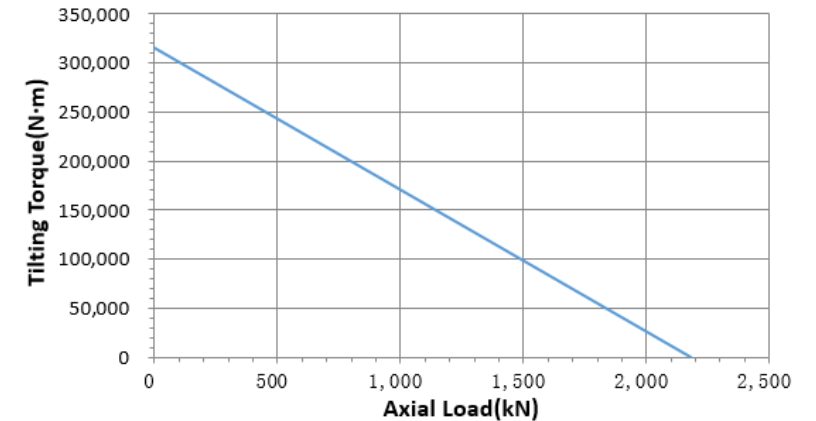

On the dimensions with parenthesis:

- 1) These are for reference only.
- 2) This is a preliminary dimension and may vary in the actual product.
- 3) If this dimension is important to the application, please communicate this back to KMI.

DESIGNED BY	JXY	2020/11/25
CHECKED BY	C F	2020/11/25
APPROVED BY	WMS	2020/11/25

**KMI GROUP**  
www.kinematicsmfg.com

ALL PROPRIETARY RIGHTS IN THE SUBJECT MATTER HEREOF ARE RESERVED, AND NO PERMISSION IS GRANTED TO REPRODUCE THIS PRINT IN WHOLE OR IN PART, OR TO DISCLOSE ANY OF THE INFORMATION TO OTHERS.	WEIGHT	SCALE
	69.888 Kg	1:6

**Slewing Ring**

SYMBOL ISO	SIZE	A3	SHEET	1/2

THE TOLERANCE NOT MENTIONED IS REFERRED TO ISO2768-VL CASTING TOLERANCE ISO 8062-CT10

**KTE-540T**

REV  
A